

EASY FLOW US1

UNDERSINK FULL FLOW WATER FILTRATION SYSTEM



APPLICATIONS

- ◆ Drinking water

FEATURES • BENEFITS

- ◆ Effortless click-in filter change-outs
- ◆ Built-in check valve system means no need to turn off the water for filter change-outs
- ◆ 3/8" push fittings for easy installation

MODELS

- ◆ OMF1S, Chlorine taste and odor reduction

INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Install vertically with the filter hanging down.
- ◆ System may be installed with the filter flush to the baseboard if desired as the mechanical assist lever pushes filters straight out.


OPERATION TIPS

- ◆ Replace filter every 5,000 gallons or 6 months (or if flow has diminished).
- ◆ System is designed with integrated check valves so the cold water line does not need to be shut off to perform filter change-outs.

INCLUDES

- ◆ Installation kit
- ◆ Installation and operation manual

EASY FLOW US1 FILTRATION SYSTEM

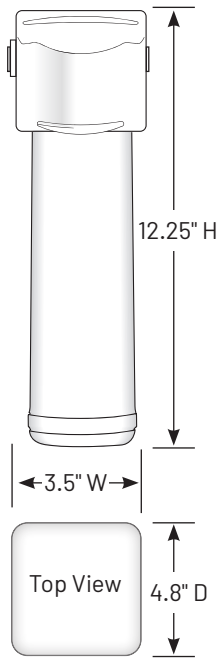

SPECIFICATIONS

- ◆ **Systems** (Model/Part No.)
OMF1S/ OMF1S-S1-S24
- ◆ **Inlet Size**
3/8" QC
- ◆ **System Dimensions**
12.25" H X 3.5" W X 4.8" D
(311 mm X 90 mm X 122 mm)
- ◆ **System Weight**
1.80 lbs
- ◆ **Contaminant Reduction**
(See chart below)
- ◆ **Micron Rating**
0.50
- ◆ **Approximate Filter Life***
Up to 6 months
- ◆ **Capacity**
5,000 gallons (18,927 Liters)
- ◆ **System Production Rate**
(See chart below)
- ◆ **Certifications**
NSF/ANSI Standard 42
- ◆ **Feed Pressure Range**
40 - 100 psi (2.75 - 6.89 bar)
- ◆ **Temperature Range**
40 - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridge** (Model/Part No.)
OMF1S-CT0/OMF1S-R1S-S24

* Filter life dependent on gallon usage and overall incoming water quality.

| PART NO. | MODEL NO. | SYSTEM PRODUCTION RATE | SUBSTANCE REDUCTIONS CLAIMS |
|--------------|-----------|------------------------|-----------------------------|
| OMF1S-S1-S24 | OMF1S | 1.25 gpm | Chlorine Taste & Odor |



OMF1S is Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of the claims specified on the Performance Data Sheet.



13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States
P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.